



MAPLE RIDGE

British Columbia

**\*\*Please be advised that this handout is a Zoning Bylaw summary only. See Zoning Bylaw for complete information.\*\***

**ONLY FOR LOTS LESS THAN 557m<sup>2</sup> IN AREA**

Building Permit Number : \_\_\_\_\_

**PROPERTY INFORMATION**

Address : \_\_\_\_\_  
 Lot Depth : \_\_\_\_\_ Min. Basement EI : \_\_\_\_\_  
 Lot Width : \_\_\_\_\_ Prop. Basement EI : \_\_\_\_\_  
 Lot Area : \_\_\_\_\_  
 Lot # : \_\_\_\_\_ Plan: \_\_\_\_\_

**COVENANTS REGISTERED ON TITLE:**

Comprehensive Design :	Y / N	
Geotechnical :	Y / N	
Fish & Wildlife :	Y / N	
DP30 Area :	Y / N	
Water Management :	Y / N	
Flood Plain :	Y / N	
Stat. Right-of-Way :	Y / N	

**SETBACKS**

		Minimum	Proposed	Complies*	
<b>Principal Structure</b>	Front	5.5 metres	m		
	Rear	<b>**6.0 metres</b>	m		
	Principal & Accessory buildings and structures must comply with visual clearance at intersections per Section 403.8 of the zoning bylaw	Left Side	1.2 metres	m	
		Right Side	1.2 metres	m	
		Exterior Side Lot Line	3.0 metres	m	

\* City of Maple Ridge use only

<b>Detached Garage / Carport / Accessory structures</b>	Front Lot Line	11 metres	m	
	Rear Lot Line	0.45 metres	m	
	Interior Side Lot Line	0.45 metres	m	
	Exterior Side Lot Line	2.0 metres	m	
	Separation between/to principal residential use	4.5 metres	m	

Min. setback to projections (bay windows, hutches, nooks, etc) from abutting interior side lot line	0.90m (3' - 0")	m	
Maximum Roof projection into the required interior side yard	0.60m (2' - 0")	m	
Maximum Roof projection into the required interior side & rear yards for <b>accessory buildings</b> is	0.45m (1'-6")	m	
Maximum Roof projection <b>into</b> front, rear or exterior side yard setbacks	1.25m (4' - 1")	m	

Dwelling's Corner Grade Elevations			AVERAGE FINISHED GRADE (lot grading plans) please see reverse	
(in meters)	Left	Right	((Add Lowest of existing or proposed grades at all exterior corners) (4 corners minimum ))/ (# of corners used, 4 min) _____ = _____ m	
Front finished gr.	a)	c)		
Rear finished gr.	b)	d)		
Dwelling's Corner Grade Elevations			AVERAGE NATURAL GRADE (No lot grading plan) please see reverse	
(in meters)	Left	Right	((Add Lowest of existing or proposed grades at all exterior corners) (4 corners minimum ))/ (# of corners used, 4 min) _____ = _____ m	
Front Existing gr.	e)	g)		
Rear Existing gr.	f)	h)		

**BUILDING HEIGHT**

Building Height measured to Mid Point between Main Roof Ridge and Eave of Highest Storey for roof pitch ≥ 4:12  
 Building Height measured to Highest point of THE Roof for Flat roofs or where the roof pitch < 4:12

BUILDING HEIGHT of:	Roof pitch	Maximum height permitted	Proposed	Complies
Principal Building		9.5 metres	m	
Accessory buildings & Structures		6.0 metres	m	

HIGHEST BUILDING FACE	Maximum	Proposed	Complies
complies with sloping 7 m Highest Building Face line (from existing grades)	7.0m	m	
complies with sloping 7 m Highest Building Face line (from finished grades)	7.0m	m	
40% exemption rule applied?	Y / N	40%	%

RETAINING WALLS	walls over 1.0 metre in height require P.Eng design	Proposed	Complies
RETAINING WALLS: maximum 1.20 m (4' - 0") height		m	

LOT COVERAGE	Maximum %	Proposed %	Maximum area (in metric)	Proposed area (in metric)
All buildings & Structures total	40%	%	m <sup>2</sup>	m <sup>2</sup>
Accessory buildings & Structures	15%	%	lesser of 279 m <sup>2</sup> or 15%	m <sup>2</sup>


**\*\*Where a high pressure gas main right-of-way is located within any portion of the required rear setback area from a rear lot line, the setback shall be not less than 5 metres from the right of way to the rear of the buildings closest projection.**

Stamp area (for City use only)

Planchecker : \_\_\_\_\_ Date : \_\_\_\_\_

**BUILDING HEIGHT:**



1. The *Building Height* shall be measured as the vertical distance from either:
  - a. the *Average Finished Grade*, or
  - b. the *Average Natural Grade* for subdivisions of less than three (3) *Lots* and for *infill Developments* which are not required by the Municipal Engineering Department to provide a *Comprehensive Lot Grading Plan*,

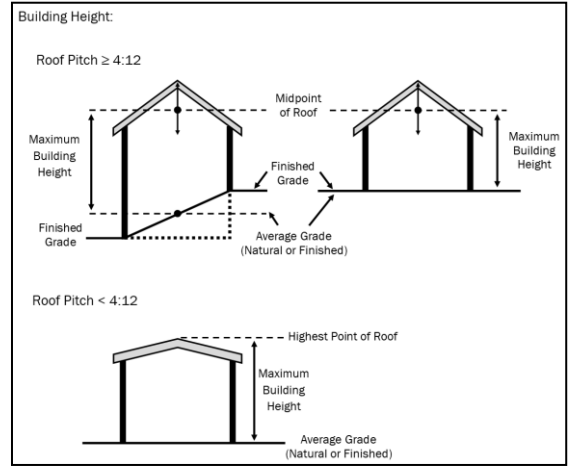

**LOCALIZED DEPRESSION:**

1. an existing localized depression in Natural Grade not exceeding 3 metres (9.8ft.) in width, or 20% of the building length that it abuts, whichever is less;
2. a localized depression below Finished Grade providing vehicle or pedestrian entrances to a building shall be subject to the following conditions:
  - a. only one vehicle entrance and one pedestrian entrance are shall be considered as Localized Depressions on a single family or two unit residential building.
  - b. on any side of the building in a single detached or two unit residential building, the Localized Depression width shall not exceed the lesser of 50% of the corresponding building width or:
    - i. 6.0m (20 ft.) width for vehicle access.
    - ii. 2.44m (8 ft.) wide 3.0 m<sup>2</sup> in area for a pedestrian access, or
    - iii. 7.3m (24 ft.) wide for a combined vehicle and pedestrian access
3. where a localized depression for a pedestrian entrance is completely covered by a deck attached to the storey immediately above it, the localized depression shall be exempt.
4. any combination of vehicle or pedestrian entrances and exist ing depressions remaining after finish grading shall not exceed 50% of the corresponding building width or length along any side of a building.










(a) Localized Depression in natural grade

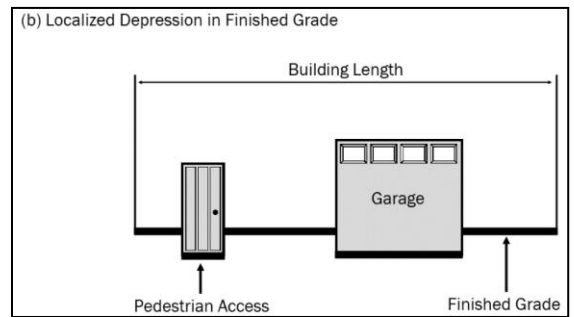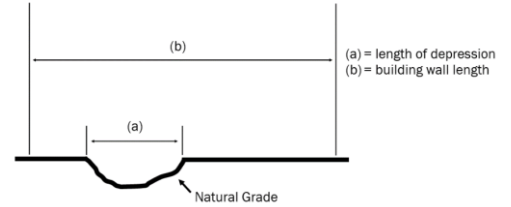

**HIGHEST BUILDING FACE EXEMPTIONS:**

- a. a maximum 40% of the length of the building face can be exempt from this regulation. Different portions of the building face can be exempted, provided that the sum of their lengths does not exceed 40% of the total length of the building face;
- b. roof eaves, decks, decorative features, and the pitched roof portion of either gable ends or dormers are exempt;
- c. any portion of the roof *Structure* above the top plate is exempt from this calculation; and
- d. 100% of the length of the rear *Building Face* is exempt for *Lots* where the entire *Rear Lot Line* abuts land dedicated by subdivision for *Park* purposes within which a *Watercourse* exists, as identified on Schedule "C" - Natural Features of the Maple Ridge Official Community Plan Bylaw No. 7060-2014 or the Streamside Setback Assessment Map of the Maple Ridge Watercourse Protection Bylaw No. 6410-2006, provided that the rear *Building* elevation is identified as the highest *Building Face*.

Exceptions:

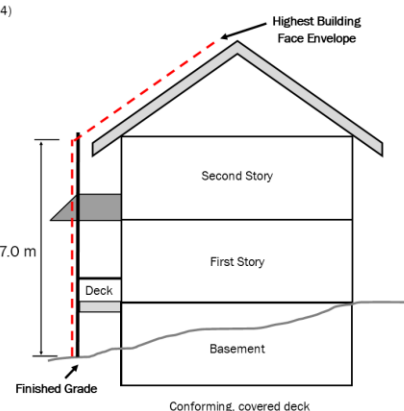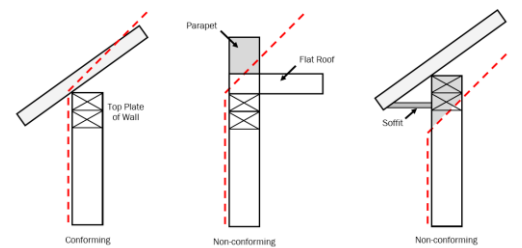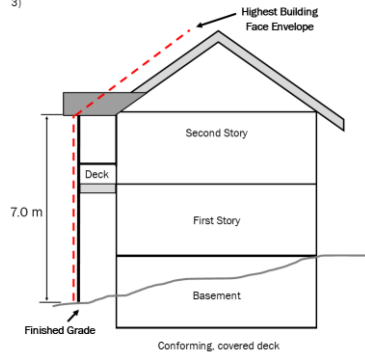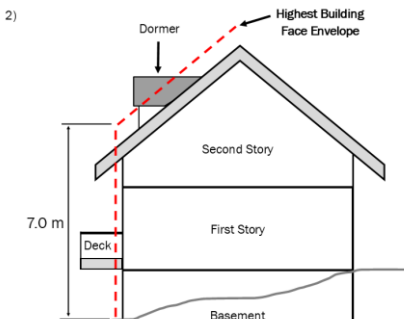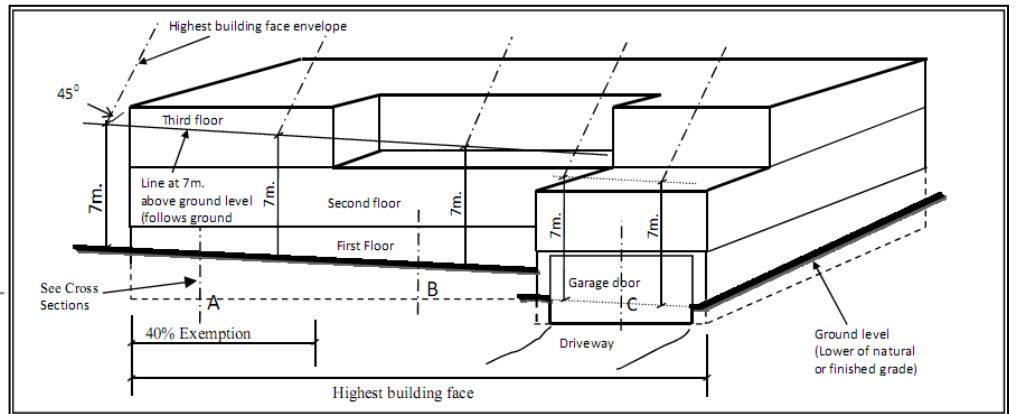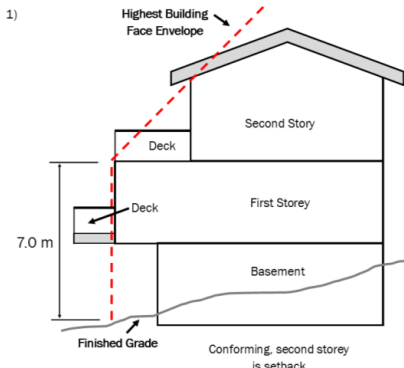

Non-conforming, but within 40% exemption

Conforming, second storey set back from first storey

Conforming, exemption for localized depression (garage)